




San Driveshaft Co., Ltd.

40 mm x 68 mm x 15 mm NACHI 7008C Matched Angular Contact Ball Bearings

Bearing No. 7008C

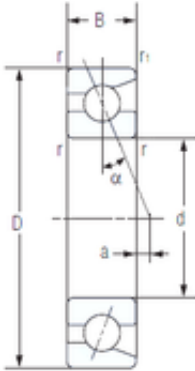

7008C Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|------------------|
| Size | 40x68x15 mm |
| Bore Diameter | 40 mm |
| Outer Diameter | 68 mm |
| Width | 15 mm |
| d | 40 mm |
| D | 68 mm |
| B | 15 mm |
| C | 15 mm |
| Angle (°) | 15 ° |
| a - | 1,3 mm |
| r min. | 1 mm |
| r1 min. | 0,6 mm |
| da min. | 45 mm |
| Da max. | 63 mm |
| ra max. | 1 mm |
| Weight | 0,21 Kg |
| Basic dynamic load rating (C) | 20,7 kN |
| Basic static load rating (C0) | 16 kN |
| (Grease) Lubrication Speed | 21600 r/min |
| Configuration | Single Row |
| Enclosure | Open |
| Bore Type | Cylindrical Bore |
| Bore Size | 40 mm |
| Outside Diameter | 68 mm |
| Width | 15 mm |



San Driveshaft Co., Ltd.

| | |
|-------------------------|------------|
| Fillet Radius/Chamfer | 1 mm |
| r1 | 0.6 mm |
| a | -1.3 mm |
| Dynamic Load Rating | 20,700 N |
| Static Load Rating | 16,000 N |
| Limiting Speed - Grease | 15,000 rpm |
| Limiting Speed - Oil | 20,000 rpm |
| da1 (min) | 45 mm |
| da2 (min) | 45 mm |
| Da1 (max) | 63 mm |
| Da2 (max) | 65 mm |
| ra (max) | 1 mm |
| ra1 (max) | 0.6 mm |